


Auto-Door Sensor


- Door activation.
- Wireless switching device using FM modulation.
- Easy to install with no wiring.



TRE-501R
Receiver

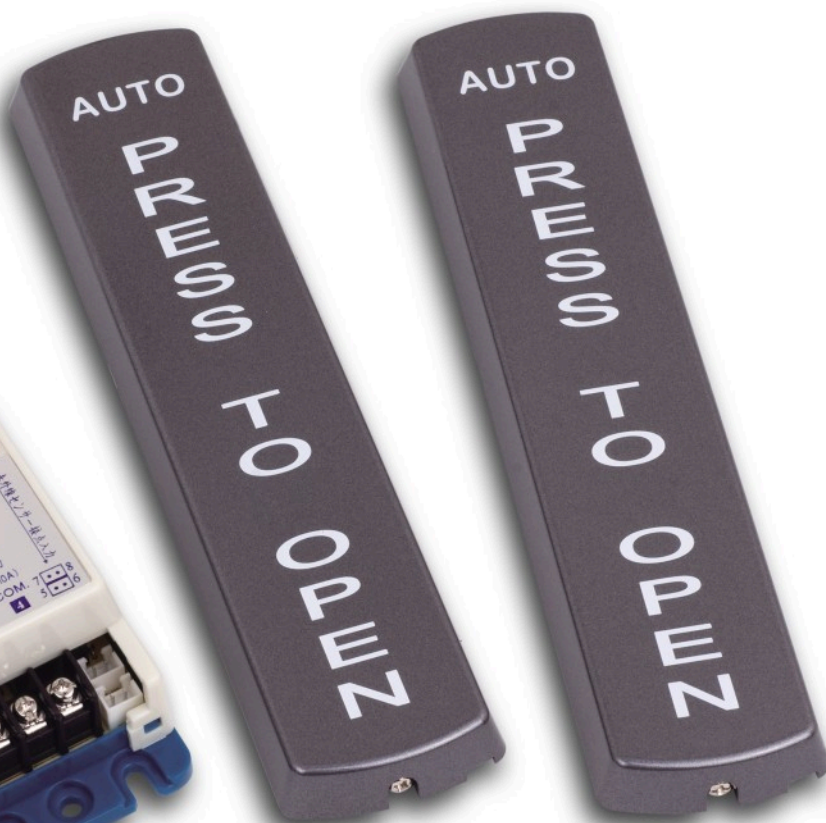

TRE-501T
Wireless Touch Sensor

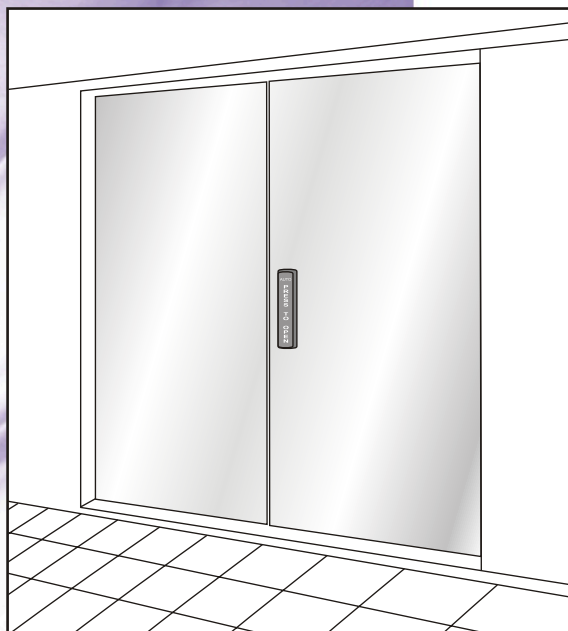

■ Specification

Item	Receiver
Model	TRE-501R
Power supply	DC12V or DC24V or AC110~230V
Relay contact	5A/120VAC
LED indicator	Standby: Red LED on Activated: Red LED off
Relay release time	1, 4, 8 sec. and on/off
Dimension	170x50x33mm
Item	Wireless Touch Sensor
Model	TRE-501T
Power supply	6V(CR2032 3Vx2 lithium battery)
Effective distance	30m
Frequency	395MHz or 315MHz
Code Combination	8-bit
Dimension	200x45x13mm